
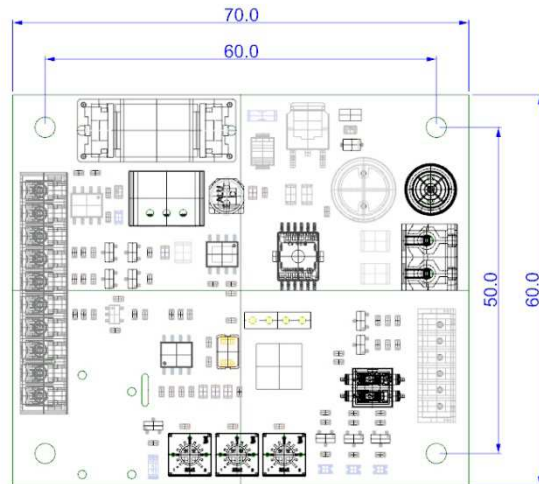


ELECTRONIC BOARD - S2

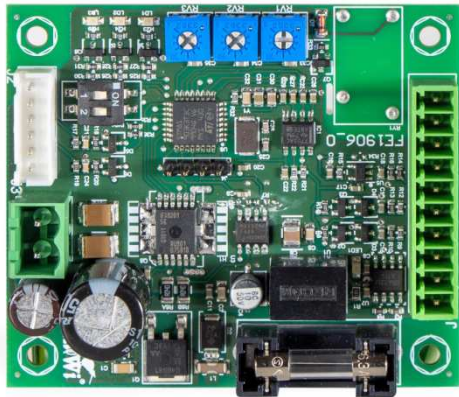

FEATURES

- bidirectional activation
- max. current: 5A DC
- power supply of the electronic board: 24V DC \pm 15%
- power supply of the gearmotor: 24V DC
- start/stop switch
- constant speed in case of torque variability thanks to the encoder management
- speed control thanks to a potentiometer or an external control with 0÷10V entrance
- regulation of the acceleration/deceleration curves
- protection of the gearmotor thanks to a fuse and a self-resetting varistor
- ***It is available a rectifier board → 24V AC → 24V DC***

ADVANTAGES

- there isn't risk of non-compatibility between gearmotor and electronic board
- sales and technica support from one supplier
- same delivery times for products which work together
- it is available also the the electric transformer