


GEARMOTOR RANGE 55.N24

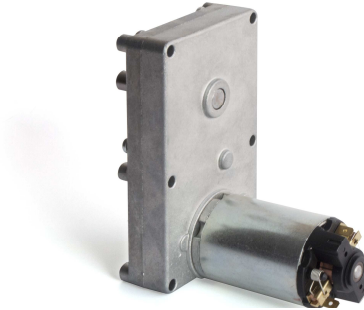

CODE CODICE	RIDUZIONE RATIO	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	DIMENCTION DIMENSIONI		WEIGHT PESO
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	L	D	
		V	rpm	Nm	mm	mm	
6006010	1/240	24	17	13,0	74	40,0	1050
6006011	1/750	24	5	13,0	74	40,0	1050
6006012	1/240	24	35	13,0	74	40,0	1050
6006013	1/750	24	12	13,0	74	40,0	1050
6006014	1/240	12	35	13,0	74	40,0	1050

FEATURES

- permanent- magnet, bi-directional electric motor, 6÷24V DC
- zama cover, Steel Mdp gears
- fastening can be done trough six (6) M5 holes
- output shaft is available with maximum \varnothing 10,0 mm
- available with magnetic encoder and custom output shaft

