



GEARMOTOR RANGE 40.2200

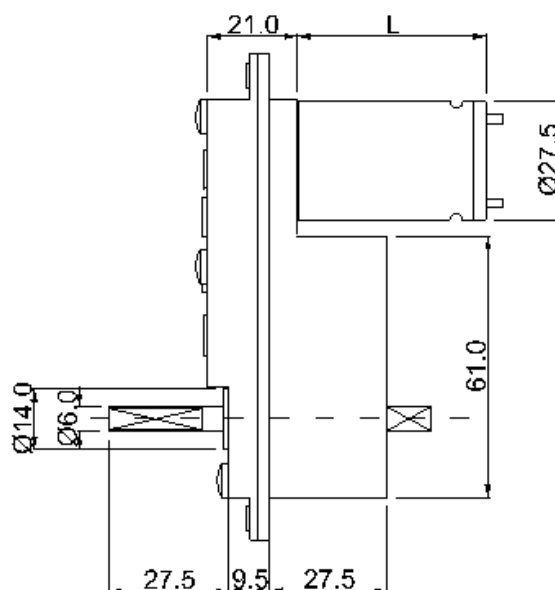

FEATURES

- Permanent-magnet, bi-directional electric motor, operating at 6÷24V
- The gear box is made by reinforced polyamide .
- The outlet shaft is in stainless steel, mounted on self-lubricating bushings.
- Fastening can be done through four (4) 4 mm dia. holes
- Intermittent service
- Customizations: custom outlet shaft, custom wiring, motor cover

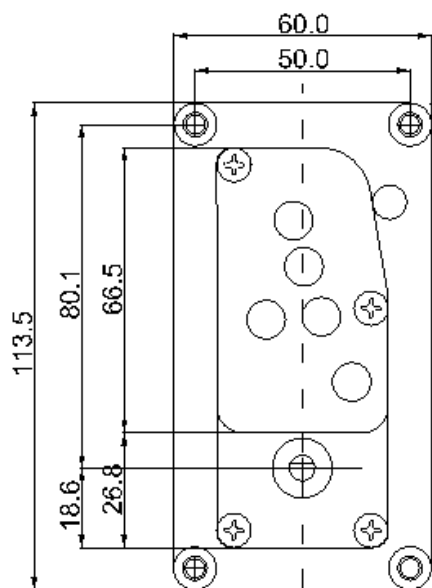

CODE CODICE	RATIO RIDUZIONE	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	DIMENTION DIMENSIONI	WEIGHT PESO
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	L	
		V	rpm	Nm	mm	
6220002	1/2200	13	2	3,0	38,0	236
6220005	1/2200	13	5	3,0	38,0	232
6220012	1/900	13	12	3,0	46,5	256
6220030	1/300	13	30	3,0	46,5	250