

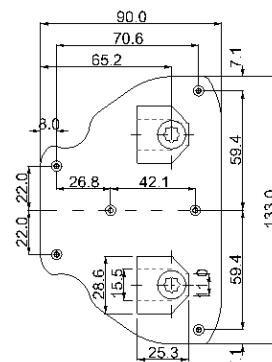



GEARMOTOR RANGE 35.0420



FEATURES

- Permanent-magnet, bi-directional electric motors, operating at 6÷24V
- The gearbox is made of thermoplastic material
- The exit hollow camshaft operates a micro switch that controls revolutions. The range with a single exit could have a snap shut fixing or it could be pressure positioned into its housing
- Range 35.0420D gear motor has a dual exit, which allows the simultaneous rotation of two discs
- Intermittent service
- Customization: Gear motor output shaft, special lubrication to allow the gear motor utilization at subzero temperatures, custom wiring



CODE CODICE	RATIO RIDUZIONE	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	WEIGHT PESO
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	
		V	rpm	Nm	
6042001	1/420	24	24	1,8	116
6042010	1/420	24	24	1,8	148