


GEARMOTOR RANGE 35.M2



FEATURES

- Permanent-magnet, bi-directional electric motor, operating at 6÷24V
- Polyamide cover, acetalic resin ratio
- Fastening can be done through six (6) 3 mm dia. Holes
- Customization: magnetic encoder and output shaft

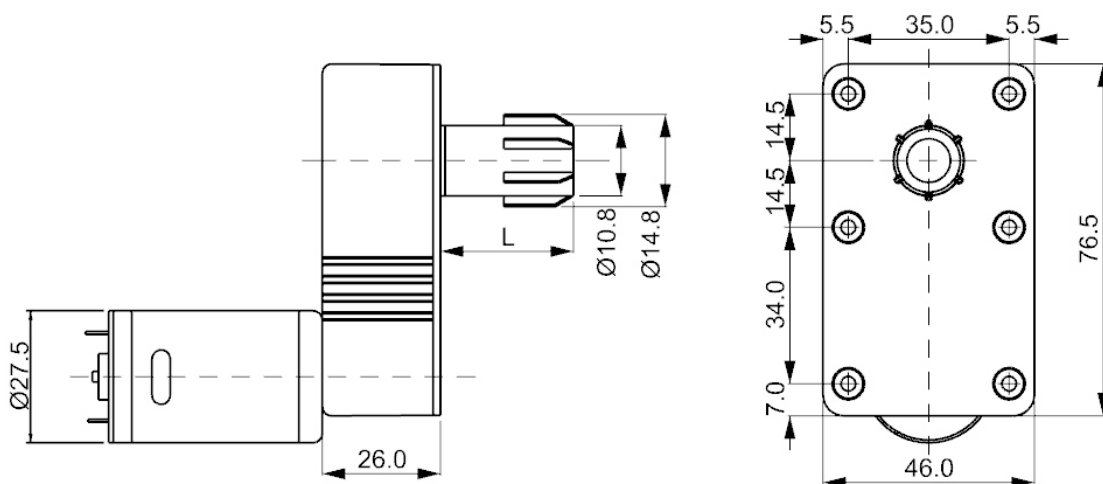



NUOVA KIWI S.R.L.

Via del Progresso 14 – 36064 Colceresa (VI) – ITALY

Tel. 0424.411937 – Fax 0424.708828

commerciale@nuovakiwi.it – www.nuovakiwi.it

CODE CODICE	RATIO RIDUZIONE	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	DIMENCTION DIMENSIONI			WEIGHT
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	L	S.A.		PESO
						SA1	SA2	
V	rpm	Nm	mm	mm	mm	g		
6020010	1/82	24	80	1,0	38,0	24,0	29,0	126
6020011	1/133	24	50	1,6	38,0	24,0	29,0	126
6020012	1/292	24	23	2,0	38,0	24,0	29,0	126
6020013	1/372	24	18	2,0	38,0	24,0	29,0	126
6020020	1/82	24	122	0,5	32,5	24,0	29,0	108
6020021	1/133	24	75	0,8	32,5	24,0	29,0	108
6020022	1/292	24	35	1,7	32,5	24,0	29,0	108
6020023	1/372	24	27	2,0	32,5	24,0	29,0	108
6020030	1/82	24	160	1,4	38,0	24,0	29,0	126
6020031	1/133	24	100	2,0	38,0	24,0	29,0	126
6020032	1/292	24	46	2,0	38,0	24,0	29,0	126
6020033	1/372	24	36	2,0	38,0	24,0	29,0	126
6020040	1/82	24	116	1,5	46,5	24,0	29,0	146
6020041	1/133	24	72	2,0	46,5	24,0	29,0	146
6020042	1/292	24	33	2,0	46,5	24,0	29,0	146
6020043	1/372	24	26	2,0	46,5	24,0	29,0	146
6020050	1/82	24	47	0,5	38,0	24,0	29,0	126
6020051	1/133	24	29	0,8	38,0	24,0	29,0	126
6020052	1/292	24	13	1,8	38,0	24,0	29,0	126
6020053	1/372	24	11	2,0	38,0	24,0	29,0	126