



GEARMOTOR RANGE 35.C300

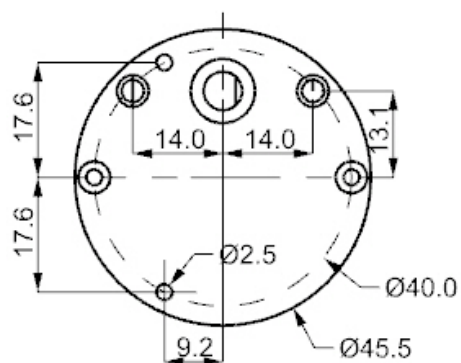

FEATURES

- permanent- magnet, bi-directional electric motor, 6÷24V DC
- zama cover, Steel Mdp gears
- fastening can be done through four (4) M4 holes
- output shaft is available with maximum $\varnothing 6,0$ mm
- available with magnetic encoder and custom output shaft

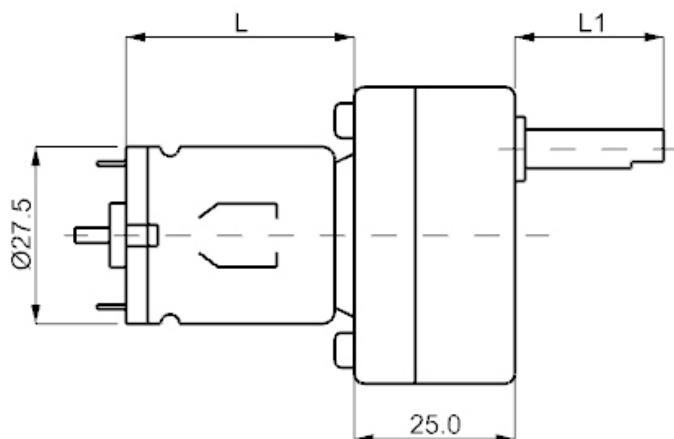



NUOVA KIWI S.R.L.

Via del Progresso 14 – 36064 Colceresa (VI) – ITALY

Tel. 0424.411937 – Fax 0424.708828

commerciale@nuovakiwi.it – www.nuovakiwi.it

CODE CODICE	RATIO RIDUZIONE	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	DIMENCTION DIMENSIONI		WEIGHT PESO
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	L	D	
		V	rpm	Nm	mm	mm	
6030010	1/277	24	39	1,2	32,5	27,5	188
6030011	1/110	24	91	0,5	32,5	27,5	186
6030012	1/44	24	227	0,2	32,5	27,5	184
6030013	1/18	24	555	0,08	32,5	27,5	184
6030016	1/277	24	24	1,2	38,0	27,5	212
6030017	1/110	24	60	1,0	38,0	27,5	210
6030018	1/44	24	151	0,4	38,0	27,5	208
6030019	1/18	24	368	0,18	38,0	27,5	208
6030028	1/277	24	65	1,2	46,5	27,5	232
6030029	1/110	24	162	1,2	46,5	27,5	230
6030030	1/44	24	406	1,2	46,5	27,5	228
6030031	1/18	24	993	0,6	46,5	27,5	228
6030034	1/277	24	35	1,2	46,5	27,5	232
6030035	1/110	24	89	1,2	46,5	27,5	230
6030036	1/44	24	222	0,7	46,5	27,5	228
6030037	1/18	24	542	0,3	46,5	27,5	228
6030040	1/277	24	48	1,2	38,0	27,5	208
6030041	1/110	24	121	1,2	38,0	27,5	206
6030042	1/44	24	300	1,1	38,0	27,5	204
6030043	1/18	24	737	0,45	38,0	27,5	204