


GEARMOTOR RANGE 80.020



FEATURES

- permanent- magnet, bi-directional electric motor
- aluminium cover
- fastening can be done through four (4) M6 holes
- output shaft is available with maximum $\varnothing$ 10,0 mm
- continuous or intermittent duty

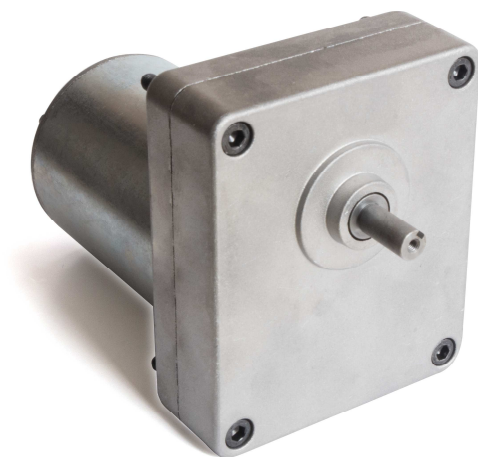


NUOVA KIWI S.R.L.

Via del Progresso 14 – 36064 Colceresa (VI) – ITALY

Tel. 0424.411937 – Fax 0424.708828

commerciale@nuovakiwi.it – www.nuovakiwi.it

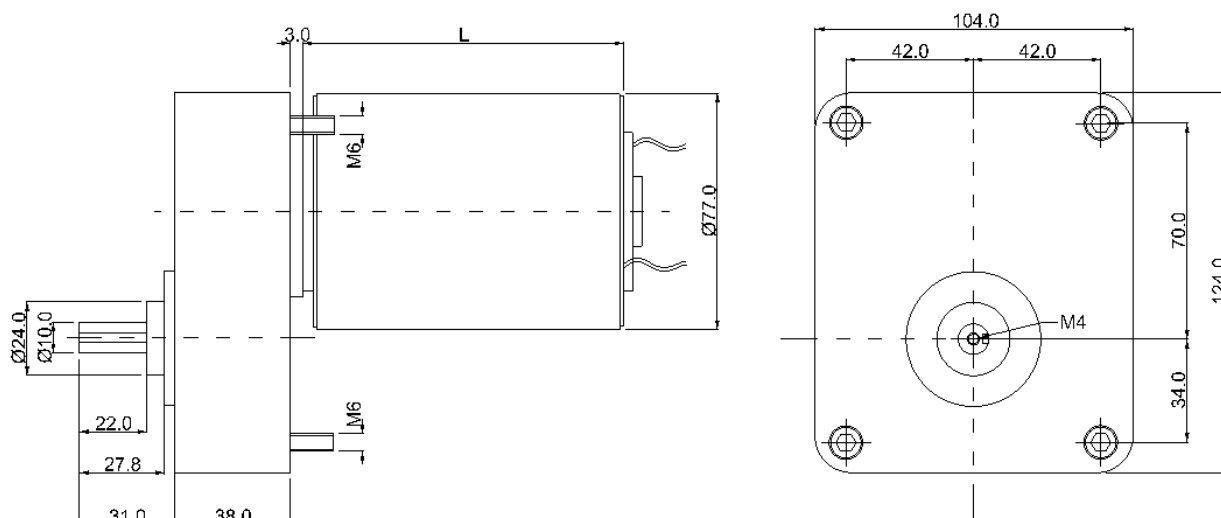

CODE CODICE	RATIO RIDUZIONE	NOMINAL VOLTAGE	NO LOAD SENZA CARICO	MAXIMUM LOAD MASSIMO CARICO	DIMENCTION DIMENSIONI		WEIGHT PESO
		TENSIONE NOMINALE	SPEED VELOCITA'	TORQUE COPPIA	L	D	
		V	rpm	Nm	mm	mm	
6020001	1/20	12	150	7,00	117,0	77,0	2418

